

For More Info 
Click Here --->

Cardboard Converter





OPERATING INSTRUCTIONS

4. Safety instructions

- Read all instructions before start-up of the device and save these instructions for later use.
- Follow all warnings and instructions marked on the product.
- Make sure no liquid is spilled on or in the device.
- Keep product out of the reach of children.
- The device should be operated only with an operator in attendance.
- You are not allowed to carry out repairs on your own.
- If there is damage or the device is not functioning properly, switch it off, pull out the plug and call customer service.



Risk of injury!

Never reach into the slit of the feed opening.



Risk of injury by pulling in!

Keep long hair, loose articles of clothing, ties, scarves, jewelry etc. away from feed opening. Material with the tendency to form loops, e.g. tapes, strapping material, etc. must not be processed.



Before changing the location, cleaning or anything else other than normal operation

turn off and unplug the device!



Maintenance and service work may be performed only by:

- customer service
- specially trained staff (e.g. qualified electricians)
- service technicians from our contracting partners

5. Installation

- The device must not be set up near a heating element or another source of warmth.
- Take care that the main plug can be reached easily.
- Before plugging in the main plug, check that the the voltage and frequency of your main supply are in accordance with the specifications on the type plate.

6. Cleaning

- Switch the device off and unplug it.
- Cleaning must only be performed with a soft fabric and a mild soapwater solution. The use of abrasive material, petrol or thinner is forbidden.



OPERATING INSTRUCTIONS


7. Operation

Switching on



- Press rocker switch pos. 1.
- Cutting unit starts.

Feeding cardboard boxes

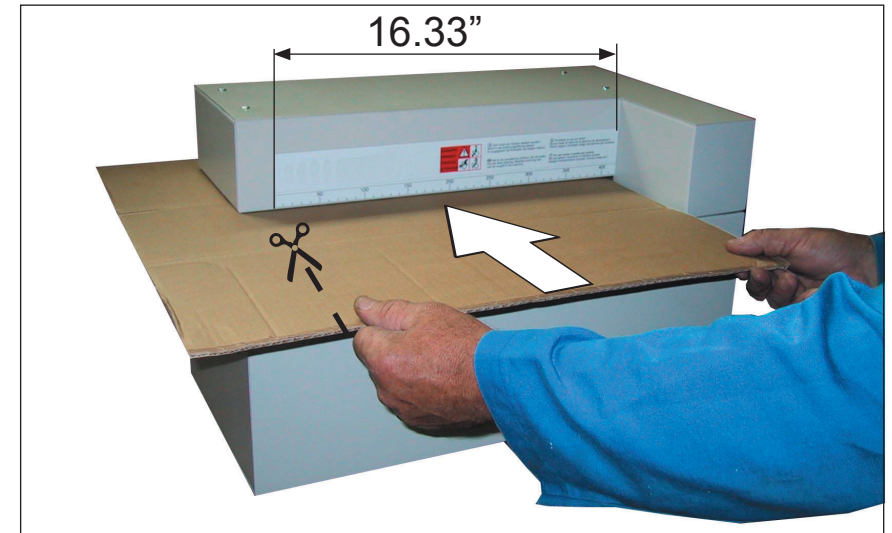

- Cardboard boxes are processed up to a width of 16.33".
- Wider cardboard is automatically cut.

Switching off



- Tap rocker switch pos. 2.
- Rocker switch resets to zero position, cutting unit stops.

8. Fault elimination



- To remove material when there's a fault, press and hold down rocker switch pos. 2.
- Cutting unit moves backwards.

If there's a fault, before notifying customer service, please check:

- Is the main plug inserted?
- Is the device switched on?
- Is the motor overloaded? Allow motor to cool down for approx. 15–20 min.



OPERATING INSTRUCTIONS

4. Safety instructions

- Read all instructions before start-up of the device and save these instructions for later use.
- Follow all warnings and instructions marked on the product.
- Make sure no liquid is spilled on or in the device.
- Keep product out of the reach of children.
- The device should be operated only with an operator in attendance.
- You are not allowed to carry out repairs on your own.
- If there is damage or the device is not functioning properly, switch it off, pull out the plug and call customer service.



Risk of injury!

Never reach into the slit of the feed opening.



Risk of injury by pulling in!

Keep long hair, loose articles of clothing, ties, scarves, jewelry etc. away from feed opening. Material with the tendency to form loops, e.g. tapes, strapping material, etc. must not be processed.



Before changing the location, cleaning or anything else other than normal operation

turn off and unplug the device!



Maintenance and service work may be performed only by:

- customer service
- specially trained staff (e.g. qualified electricians)
- service technicians from our contracting partners

5. Installation

- The device must not be set up near a heating element or another source of warmth.
- Take care that the main plug can be reached easily.
- Before plugging in the main plug, check that the the voltage and frequency of your main supply are in accordance with the specifications on the type plate.

6. Cleaning

- Switch the device off and unplug it.
- Cleaning must only be performed with a soft fabric and a mild soapwater solution. The use of abrasive material, petrol or thinner is forbidden.



OPERATING INSTRUCTIONS


7. Operation

Switching on



- Press rocker switch pos. 1.
- Cutting unit starts.

Feeding cardboard boxes

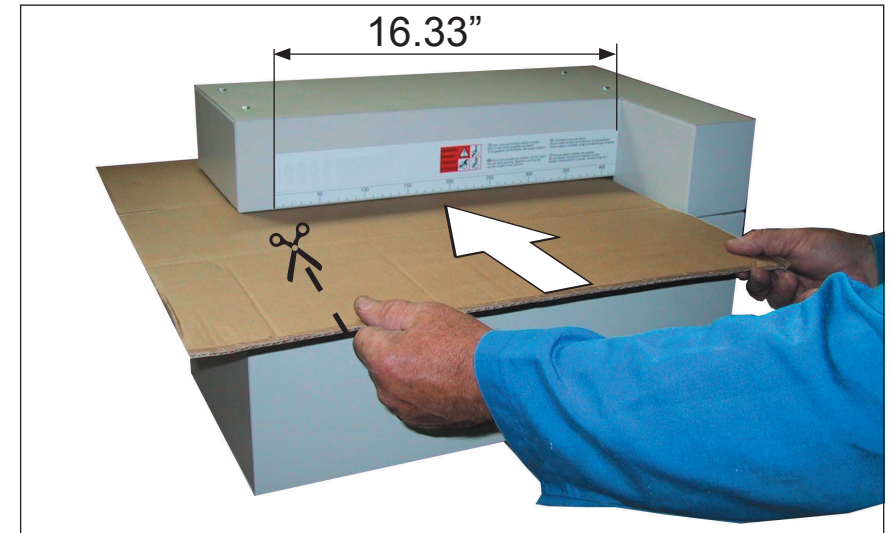

- Cardboard boxes are processed up to a width of 16.33".
- Wider cardboard is automatically cut.

Switching off



- Tap rocker switch pos. 2.
- Rocker switch resets to zero position, cutting unit stops.

8. Fault elimination



- To remove material when there's a fault, press and hold down rocker switch pos. 2.
- Cutting unit moves backwards.

If there's a fault, before notifying customer service, please check:

- Is the main plug inserted?
- Is the device switched on?
- Is the motor overloaded? Allow motor to cool down for approx. 15–20 min.